

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number
WO 2005/095267 A1

(51) International Patent Classification⁷: **C01B 3/38**,
3/50, B01J 19/24

Nojima B201, 18-1, Nojima-cho, Kanazawa-ku, Yokohama-shi, Kanagawa, 2360025 (JP).

(21) International Application Number:
PCT/JP2005/006712

(74) Agent: **GOTO, Masaki**; Shoyu-Kaikan, 3-1, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 1000013 (JP).

(22) International Filing Date: 30 March 2005 (30.03.2005)

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-110166 2 April 2004 (02.04.2004) JP

(71) Applicant (*for all designated States except US*): **NISSAN MOTOR CO., LTD.** [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa, 2210023 (JP).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **KAMIJO, Motohisa** [JP/JP]; 4-15-12, Jomyoji, Kamakura-shi, Kanagawa, 2480003 (JP). **MIWA, Hiromichi** [JP/JP]; I-607, 553-1, Shinano-cho, Totsuka-ku, Yokohama-shi, Kanagawa, 2440801 (JP). **ROUYEYRE, Luc** [FR/JP]; Marojiru

[Continued on next page]

(54) Title: FUEL REFORMER

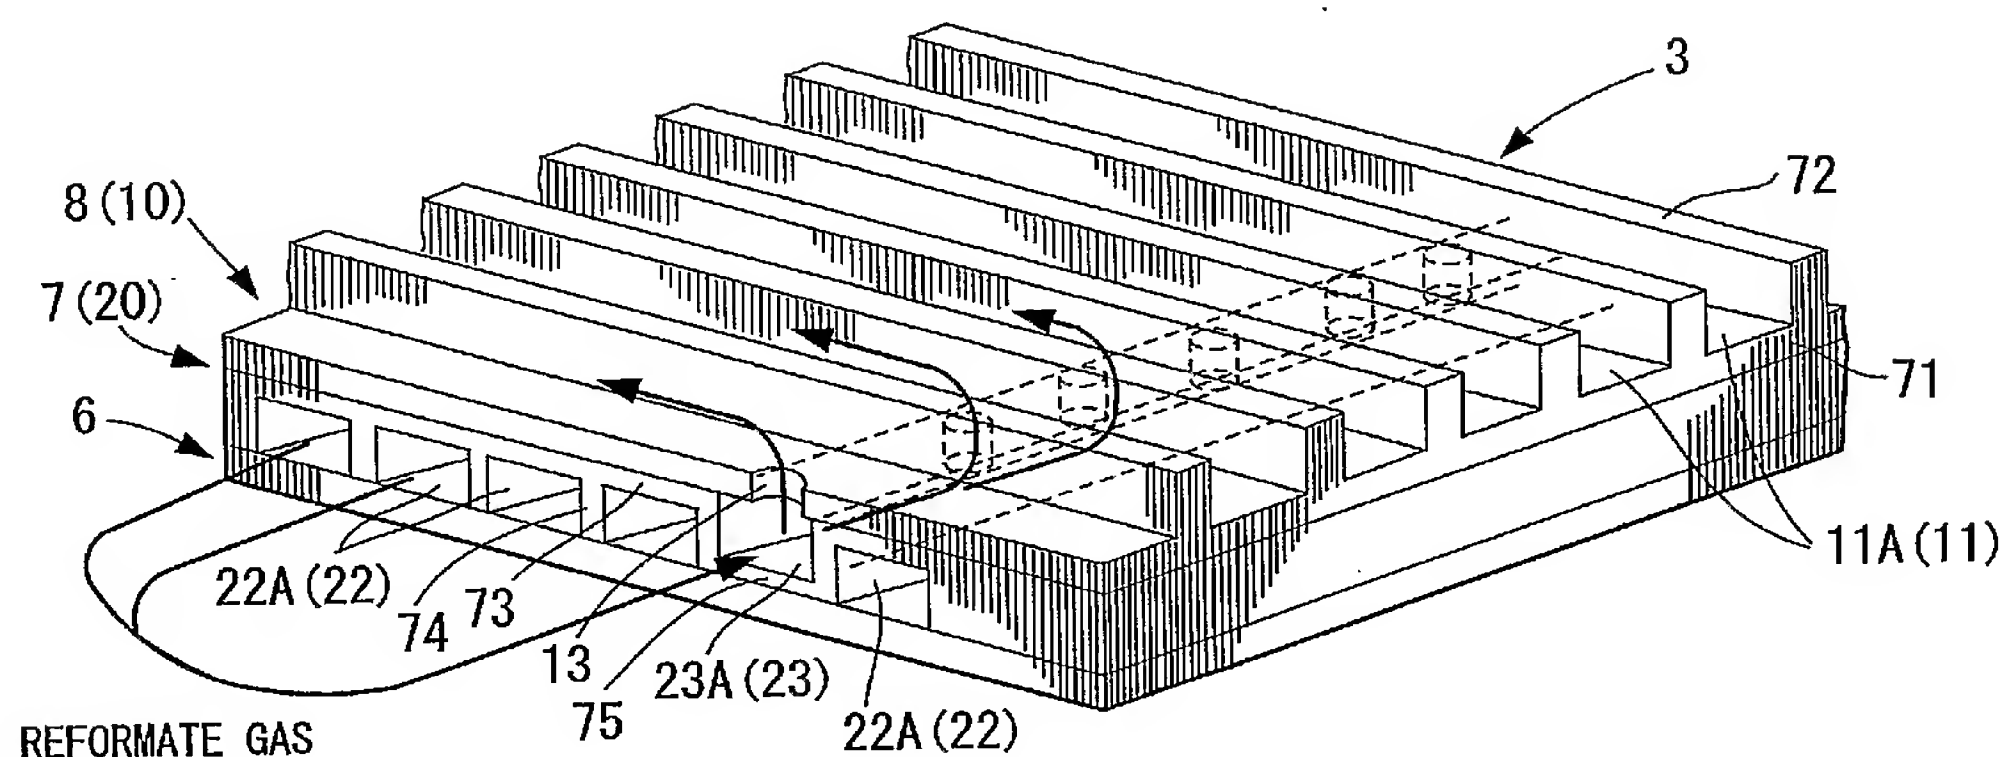

(57) Abstract: A fuel reformer includes a reforming element (7) having at least one reforming catalyst passage (22) supporting a reforming catalyst which generates reformat gas from fuel; and a combustion element (8) having at least one combustion gas passage (11), which heats the reforming element (7) by the heat of combustion gas generated by burning the generated reformat gas supplied in air introduced in said at least one combustion gas passage (11). The reforming element (7) and combustion element (8) are laminated in the fuel reformer. The fuel reformer further includes plural supply holes (13) arranged in a line along said at least one combustion gas passage (11), each supply hole (13) communicating with said at least one combustion gas passage (11). At least part of the generated reformat gas is supplied to each supply hole, and is burnt downstream of each supply hole.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.